

Product Guide

Manufacturers

of Quality

Architectural

Fiberglass

Products



**FIBERGLASS
SPECIALTIES
INCORPORATED**

www.fsiweb.com

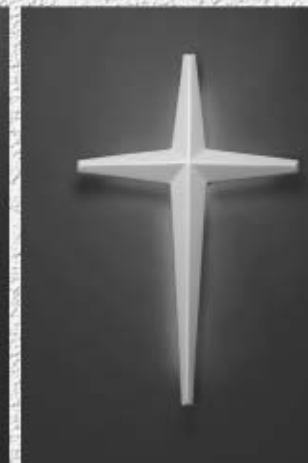
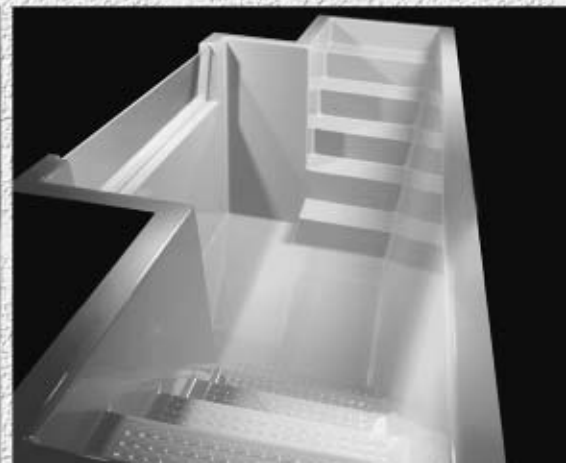


Table of Contents

Steeple	3-10
Steeple & Cupola Accessories	11
Cupola	12-14
Lighthouse	15
Domes	16
Finials	17
Steeple & Cupola Installation Guidelines	18-19
Baptistries	20-24
Baptistry Accessories	24-25
Baptistry Installation Guidelines	24
Baptistry Heaters	26-27
Optional Items	26
Wall & Roof Crosses	28

About the Company...

Founded in 1963, Fiberglass Specialties was one of the first manufacturers of fiberglass church baptistries, steeples, and wall crosses. Today we are the market leader, with the largest line of products in the industry. Our strong desire to improve our products and better serve our customers are the driving forces behind our constant innovation.


Fiberglass Specialties is a family owned business, now in its second generation. Owner and President Rocky Hall takes a hands-on approach not unlike that of his father, Howard Hall, who began the company over forty-five years ago.

We invite you to visit our 65,000 square foot manufacturing and office facility and see for yourself why Fiberglass Specialties is a name you can trust.

RULE OF THUMB—Architects generally select a steeple that is about the same height as the distance from the ground to the peak of the roof of the building.

NOTE: All measurements, weights, and drawings shown in the catalog are rounded off and approximate.

Steeple & Cupola Elements

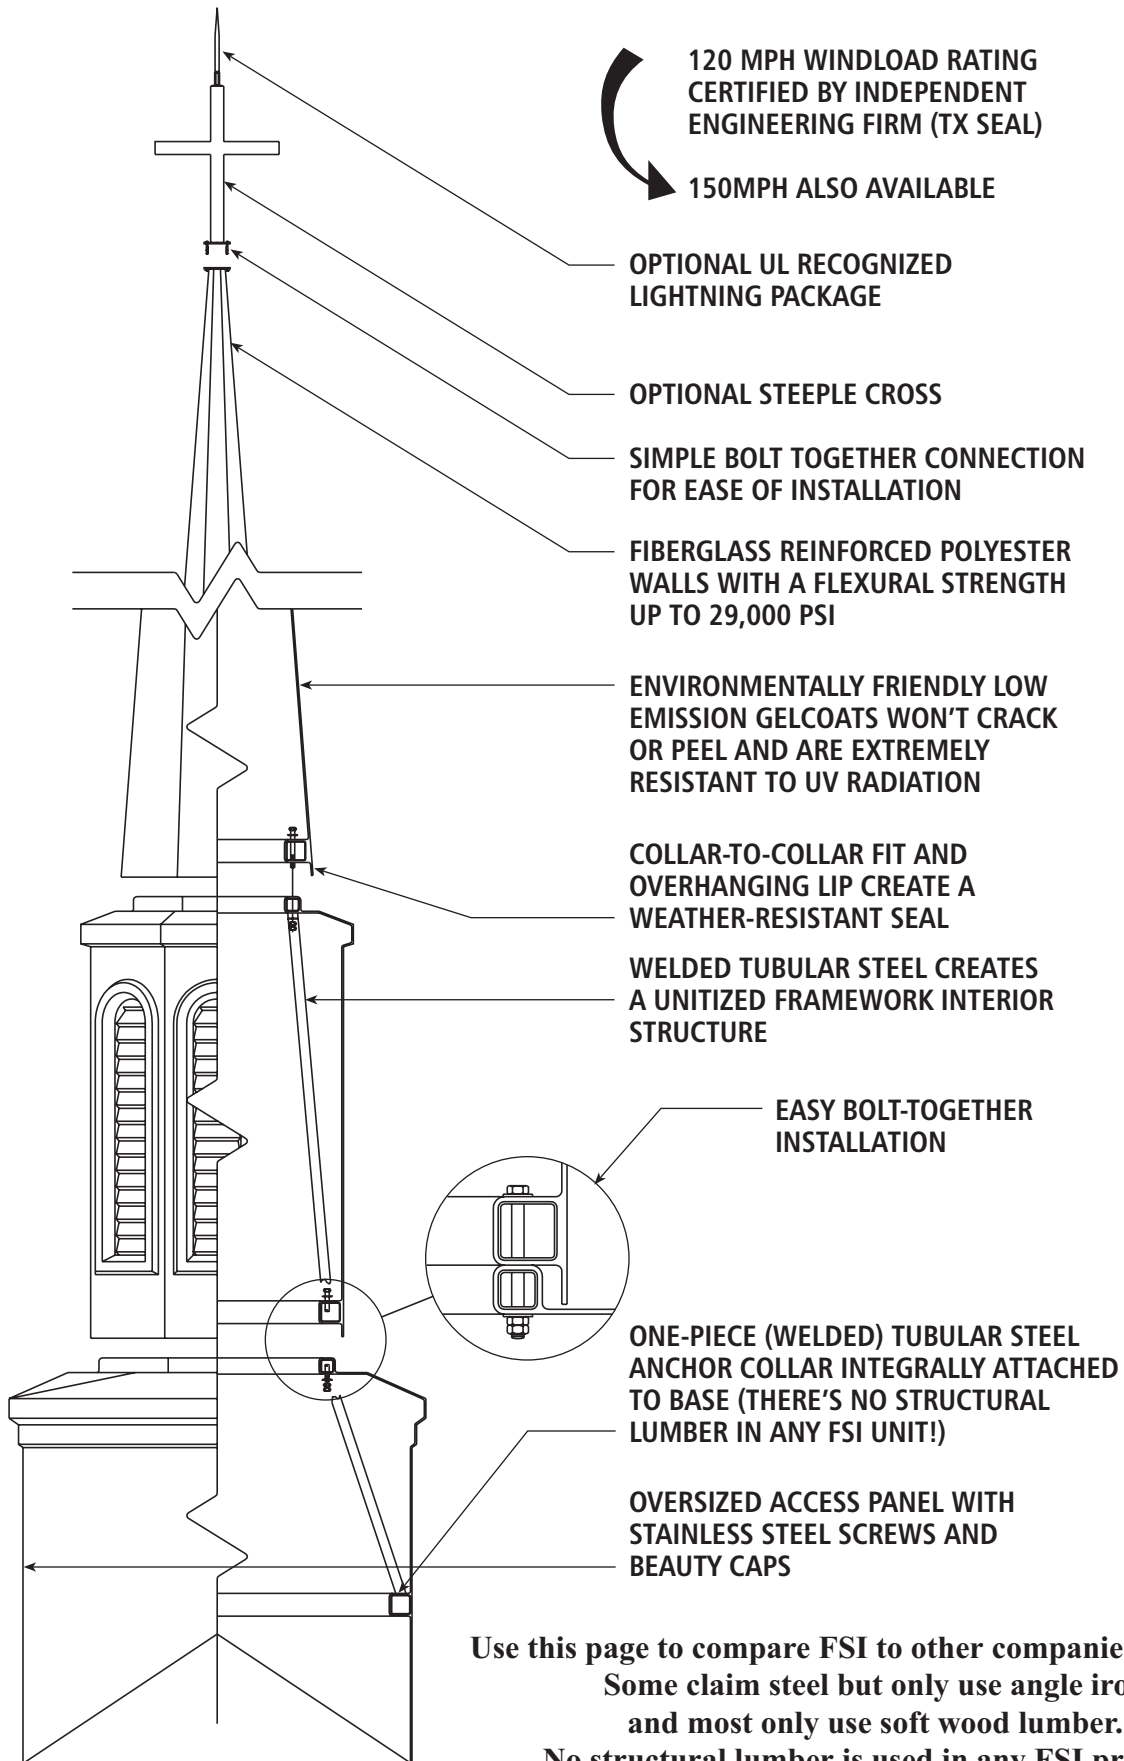

120 MPH WINDLOAD RATING
CERTIFIED BY INDEPENDENT
ENGINEERING FIRM (TX SEAL)

150MPH ALSO AVAILABLE

OPTIONAL UL RECOGNIZED
LIGHTNING PACKAGE

OPTIONAL STEEPLE CROSS

SIMPLE BOLT TOGETHER CONNECTION
FOR EASE OF INSTALLATION

FIBERGLASS REINFORCED POLYESTER
WALLS WITH A FLEXURAL STRENGTH
UP TO 29,000 PSI

ENVIRONMENTALLY FRIENDLY LOW
EMISSION GELCOATS WON'T CRACK
OR PEEL AND ARE EXTREMELY
RESISTANT TO UV RADIATION

COLLAR-TO-COLLAR FIT AND
OVERHANGING LIP CREATE A
WEATHER-RESISTANT SEAL

WELDED TUBULAR STEEL CREATES
A UNITIZED FRAMEWORK INTERIOR
STRUCTURE

EASY BOLT-TOGETHER
INSTALLATION

ONE-PIECE (WELDED) TUBULAR STEEL
ANCHOR COLLAR INTEGRALLY ATTACHED
TO BASE (THERE'S NO STRUCTURAL
LUMBER IN ANY FSI UNIT!)

OVERSIZED ACCESS PANEL WITH
STAINLESS STEEL SCREWS AND
BEAUTY CAPS

**Use this page to compare FSI to other companies' products.
Some claim steel but only use angle iron
and most only use soft wood lumber.
No structural lumber is used in any FSI product.**


Complete Cupola Units

All prices are FOB Henderson, Texas
Please call for freight rates

Cupola #CU1104

Height: 3'6"
Base: 3'0"
75 lbs


One piece unit



Vented louvers

Cupola #CU1156


Height: 5'6"
Base: 3'0"
150 lbs



Vented louvers
Krinklglass windows

Cupola #CU1162


Height: 5'6"
Base: 3'0"
150 lbs



Vented louvers
Krinklglass windows

Cupola #CU1170


Height: 7'0"
Base: 3'0"
225 lbs



False louvers (square top)
Vented louvers (square top)
Krinklglass windows (square top)

Cupola #CU1170H


Height: 7'0"
Base: 3'0"
225 lbs



False louvers (square top)
Vented louvers (square top)
Krinklglass windows (square top)

Cupola #CU1103


Height: 8'3"
Base: 3'8"
325 lbs



False louvers (round top)
Vented louvers (round top)
Krinklglass windows (round top)

Cupola #CU1103S


Height: 8'3"
Base: 3'8"
325 lbs



False louvers (round top)
Vented louvers (round top)
Krinklglass windows (round top)

Cupola #CU1105


Height: 9'0"
Base: 4'0"
350 lbs
One piece unit



False louvers (round top)
Vented louvers (round top)
Krinklglass windows (round top)

Cupola #CU1190

Height: 9'0"
Base: 3'8"
350 lbs




False louvers (square top)
Vented louvers (square top)
Krinklglass windows (square top)

Complete Cupola Units

All prices are FOB Henderson, Texas
Please call for freight rates

Cupola #CU1190H


Height: 9'0"
Base: 3'8"
350 lbs



False louvers (square top)
Vented louvers (square top)
Krinklglass windows (square top)

Cupola #CU1100

Height: 10'9"
Base: 4'6"
525 lbs




Dome #802
Cupola #802

False louvers (square top)
Vented louvers (square top)
Krinklglass windows (square top)
Round top also available

Cupola #CU1100H

Height: 10'9"
Base: 4'6"
525 lbs



Dome #802H
Cupola #802

False louvers (square top)
Vented louvers (square top)
Krinklglass windows (square top)
Round top also available

Cupola #CU1107


Height: 14'6"
Base: 5'0"
600 lbs
Dome #603H
Cupola #603
Base Cupola #604



False louvers (round top)
Vented louvers (round top)
Krinklglass windows (round top)
Square top also available

Cupola #CU1102

Height: 13'8"
Base: 6'0"
700 lbs

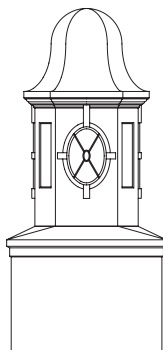


Dome/Cupola #605A
Base Cupola #607

Vented louvers (oval only)
Krinklglass windows (oval only)

Cupola #CU1165

Height: 10'9"
Base: 4'0"
430 lbs
Cupola #1156
Cupola #1105



False louvers
Vented louvers (bottom unit only)
Krinklglass windows (bottom unit only)

Cupola #CU1101


Height: 14'6"
Base: 7'0"
1025 lbs
Dome #701
Cupola #701
Base Cupola #702



False louvers (round top)
Vented louvers (round top)
Krinklglass windows (round top)

Cupola #CU1101H


Height: 14'6"
Base: 7'0"
1025 lbs
Dome #701H
Cupola #701
Base Cupola #702



False louvers (round top)
Vented louvers (round top)
Krinklglass windows (round top)

NEW! Cupola #CU1101RD

Height: 14'6"
Base: 7'0"
1025 lbs
Dome #701RD
Cupola #701
Base Cupola #702




False louvers (round top)
Vented louvers (round top)
Krinklglass windows (round top)

Complete Cupola Units

All prices are FOB Henderson, Texas
Please call for freight rates

Cupola #CU1400

Height: 18'0"
Base: 8'0"
1550 lbs

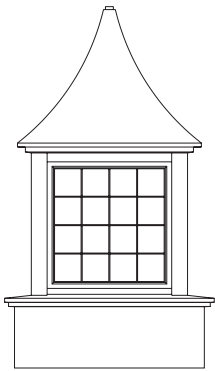


One piece unit



Vented louvers (square top)
Krinkglas windows (square top)

Cupola #CU1109H

Height: 22'0"
Base: 10'0"
2150 lbs

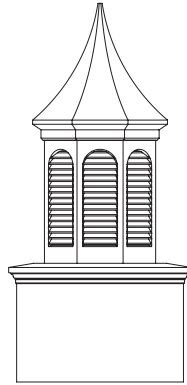

Dome #1050
Cupola #1050
Base Cupola #705


Order CU1109
for "Dome top"
as shown
on CU1108



Vented louvers (round top)
Krinkglas windows (round top)

Cupola #CU1108

Height: 21'6"
Base: 8'9"
2100 lbs

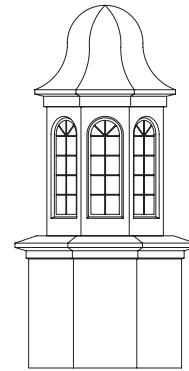

Dome #1050
Cupola #1050
Base Cupola #1075


Order CU1108H
for "Hat style"
as shown
on CU1109



Vented louvers (round top)
Krinkglas windows (round top)

NEW! Cupola #CU1108CB

Height: 21'6"
Base: 10'0"
2100 lbs

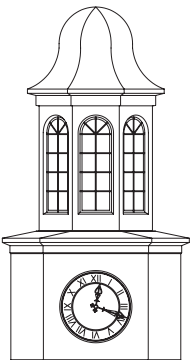


Dome #1050
Cupola #1050
Base Cupola #1076



Vented louvers (round top)
Krinkglas windows (round top)

Cupola #CU1127

Height: 11'8"
Base: 6'0"
900 lbs




Cupola #405
Base #607



Vented louvers
Krinkglas windows

Cupola #CU1200

Height: 21'0"
Base: 10'0"
2100 lbs

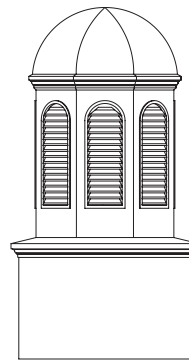


Dome/Cupola #1250
Base Cupola #705



Vented louvers (round top)
Krinkglas windows (round top)

Cupola #CU1106H

Height: 25'6"
Base: 10'0"
2200 lbs

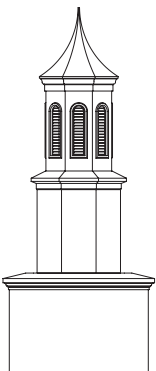


Dome #701H
Cupola #701
Cupola #700
Base Cupola #705



False louvers (round top)
Vented louvers (round top)
Krinkglas windows (round top)

NEW! Cupola #CU1106CB

Height: 25'6"
Base: 10'0"
2200 lbs

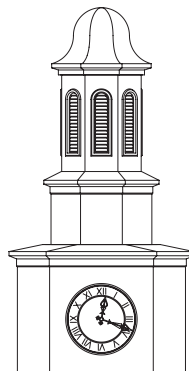


Dome #701
Cupola #701
Cupola #700
Base Cupola #1076



False louvers (round top)
Vented louvers (round top)
Krinkglas windows (round top)

Cupola #CU1300

Height: 28'0"
Base: 10'0"
2800 lbs

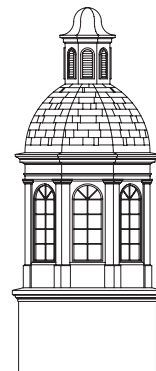


Top Cupola #1103A
Dome Cupola #1301
Base Cupola #705



Vented louvers (round top)
Krinkglas windows (round top)

Lighthouse

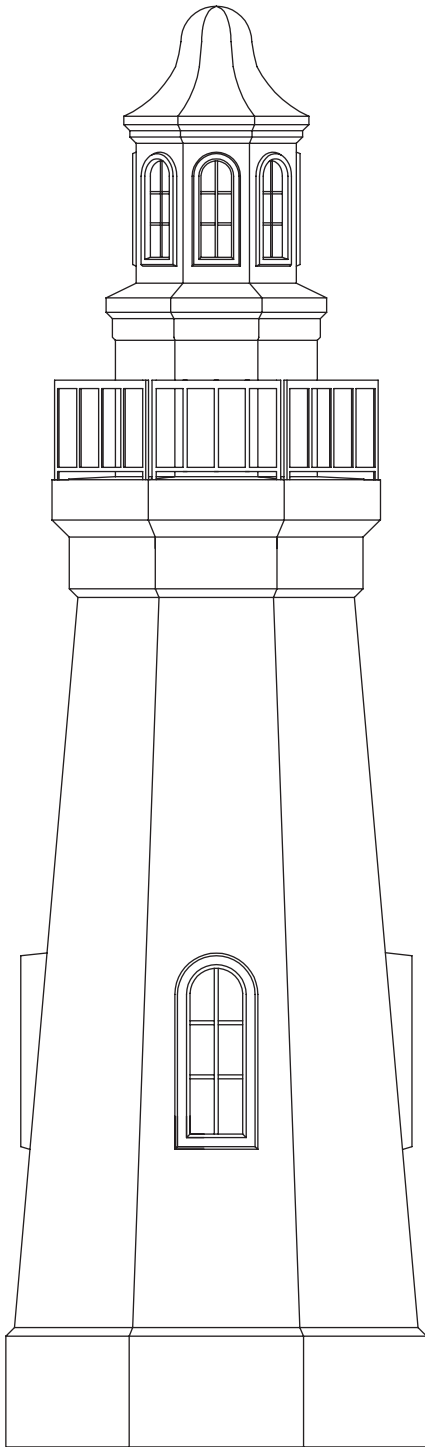

#LH1

Height: 29'0"

Base: 8'8"

2100 lbs

Components:

Cupola #CU-1105

Optional Picket Railing


Base Cupola #2007

FSI's new Lighthouse is the perfect element for commercial, marina, and even religious facilities. The Lighthouse can be ground or roof mounted. Backlighting of the windows is also available.

FSI manufactures both standard and custom domes. Domes up to 8' are shipped as a single unit, ready to lift and install. Domes up to 16' are shipped in two sections with assembly materials and pre-drilled bolt holes. Special finishes (including copper) are available for an additional charge. Custom domes are also available. Consult factory for pricing.


DOME 6

Smooth Dome
6' Diameter,
3' Radius
Weight: 175 lbs.

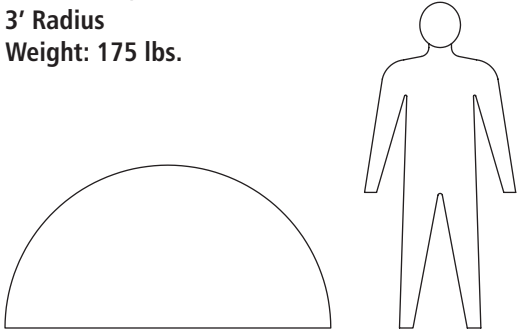


DOME 8

Smooth Dome
8' Diameter,
4' Radius
Weight: 305 lbs.

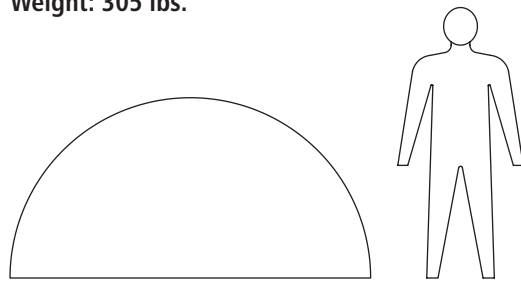


DOME 10

Smooth Dome
9'6" Diameter,
4'9" Radius
Weight: 475 lbs.

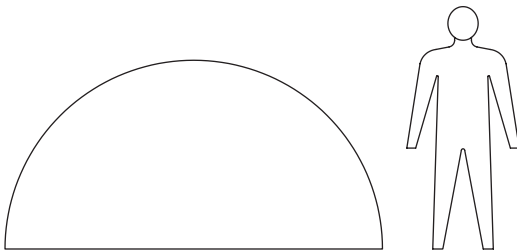


DOME 12

Smooth Dome
12' Diameter,
6' Radius
Weight: 1135 lbs.

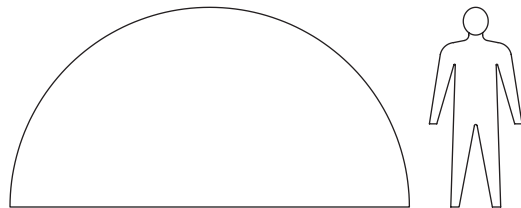


DOME 16 / DOME 16S

16' Diameter,
8' Radius
Weight: 1540 lbs.

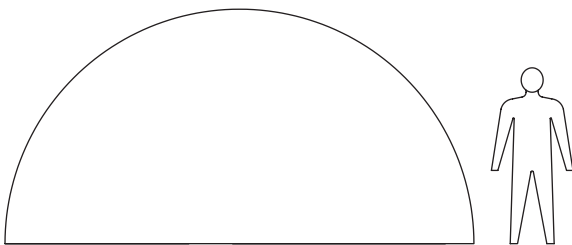













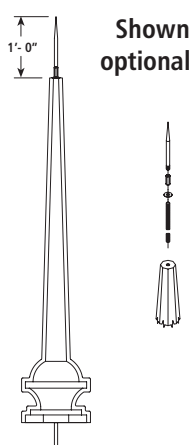


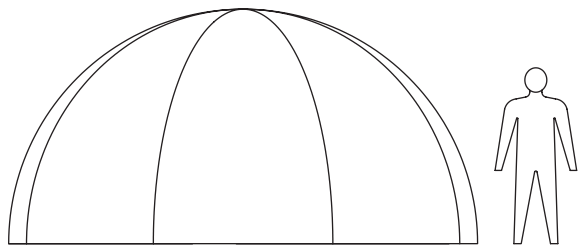CUSTOM DOME

Custom Domes of
all sizes available
- consult factory




FSI has a large variety of standard finials. Many of the designs can be added to our standard cupolas. Custom finials are also available. All finials are round, some with square bases.

<p>FIN 01</p> <p>Height: 1'11" Base: 6"</p>  <p>Square Base</p>	<p>FIN 02</p> <p>Height: 3'0" Base: 6"</p>  <p>Square Base</p>	<p>FIN 03</p> <p>Height: 3'3" Base: 1'0"</p>  <p>Square Base</p>	<p>FIN 04</p> <p>Height: 4'7" Base: 6"</p>  <p>Square Base</p>	<p>FIN 05</p> <p>Height: 4'2" Base: 1'3"</p>  <p>Square Base</p>
<p>FIN 06</p> <p>Height: 5'0" Base: 9"</p>  <p>Square Base</p>	<p>FIN 07</p> <p>Height: 5'10" Base: 8"</p>  <p>Square Base</p>	<p>FIN 08</p> <p>Height: 6'4" Base: 4"</p>  <p>Square Base</p>	<p>FIN 09</p> <p>Height: 6'8" Base: 2'3"</p>  <p>Square Base</p>	<p>FIN 10</p> <p>Height: 7'0" Base: 1'3"</p>  <p>Square Base</p>
<p>FIN 11</p> <p>Height: 9'3.5" Base: 9.5"</p>  <p>Square Base</p>	<p>FIN 12</p> <p>Height: 10'0" Base: 10"</p>  <p>Square Base</p>	<p>FIN 13</p> <p>Height: 12'0" Base: 2'0"</p>  <p>Square Base</p>	<p>FIN 14</p> <p>Height: 3'3" Base: 10"</p>  <p>Square Base</p>	<p>MOUNTING</p> <p>Shown with optional "LP"</p> 

NOTE: All finials, except FIN 14, available with Lightning Package. FSI standard colors and custom colors available.

Steeple & Cupola Installation

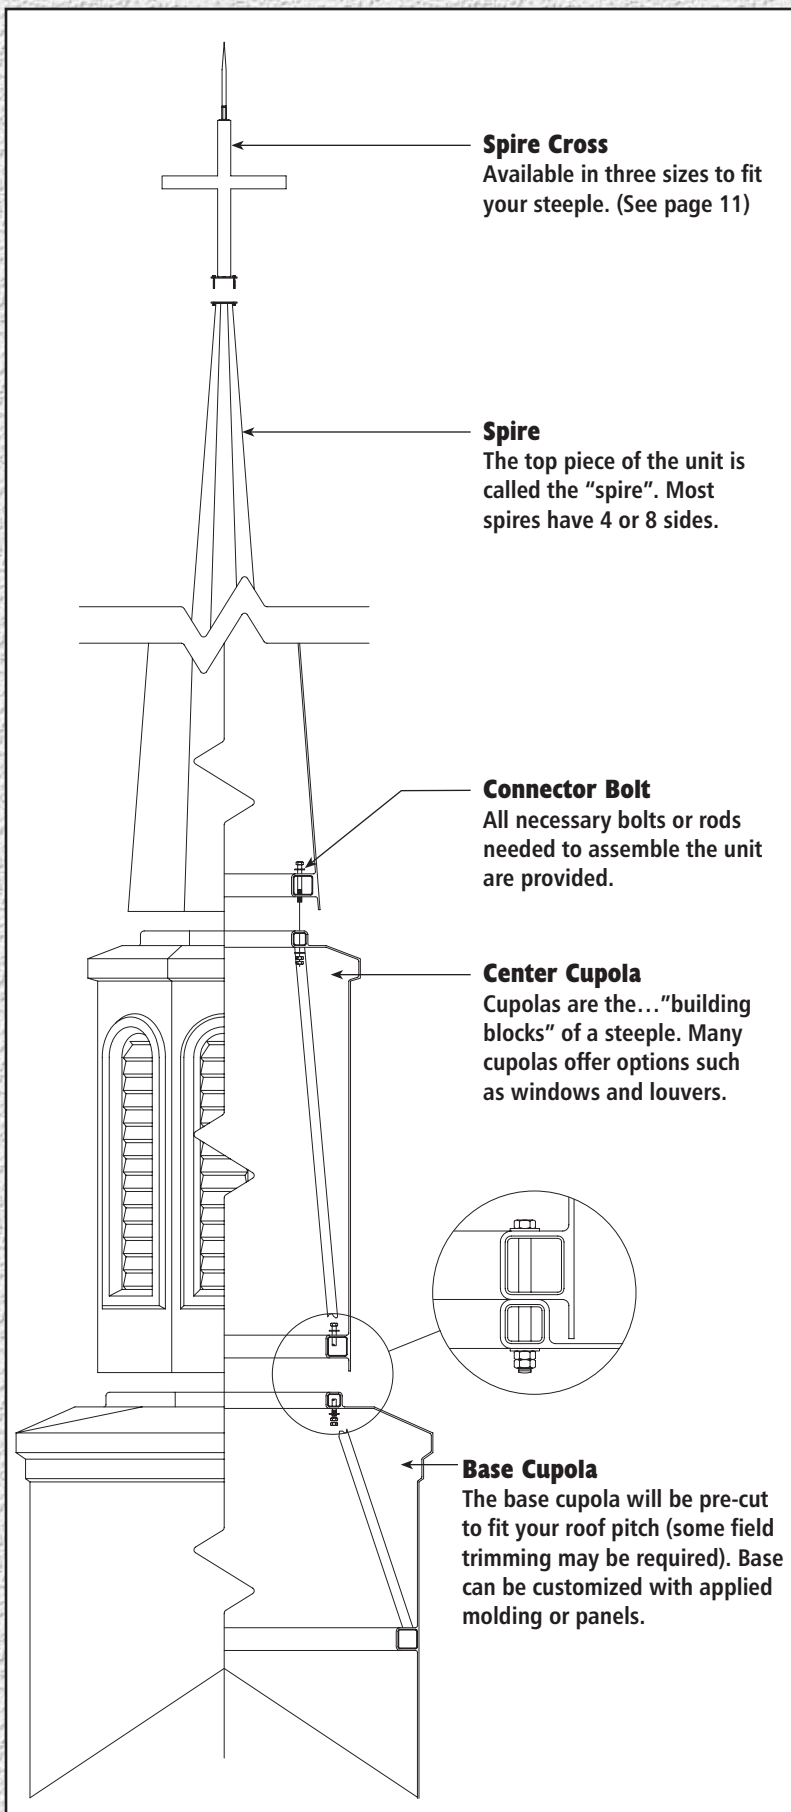

Unloading

When your new steeple arrives, you should plan to have adequate manpower to assist the driver in unloading. It is important to check the steeple for freight damage at this point, and report any irregularities immediately.

Anchor Holes

Your steeple will arrive with tubular steel anchoring members at its base; holes for the anchor bolts are pre-drilled. Because of the many different roof pitches and types, these holes are difficult to locate precisely in advance; therefore, we recommend that your installer not attempt to locate exact anchor points until the steeple is on site.

Assembly

Your new steeple will be delivered in sections (except for one-piece units). Bolts will be provided with which to assemble the various components. Your installer will need to provide the bolts that anchor the base unit to the roof.

Waterproofing

Our steeples and cupolas are typically designed to be mounted above the finished roof surface, not open to the building below. Although they are designed to be leak resistant, they are not insulated; therefore, condensation can occur inside the steeple. Openings such as vented louvers can also allow moisture to enter the unit. For these reasons, we recommend waterproofing any roof openings under the steeple, including sealing around all anchor bolts.

Typical Anchoring Detail

Because every building is different, exact installation techniques will vary. The drawing below demonstrates one of the most commonly used anchoring methods.


The installer should verify that the steeple or cupola is firmly bolted to structural members sufficient to withstand the wind load forces imposed by the steeple. Fiberglass Specialties, Inc.

can provide these loads to your building engineer or architect upon request.


All FSI steeples are designed to rest on the fiberglass panels or the steel anchoring collar.

To prevent shingle damage, the installer may wish to rest the fiberglass edge on a metal flashing. This can be easily installed by attaching it to the steeple base.

Steel Anchoring!

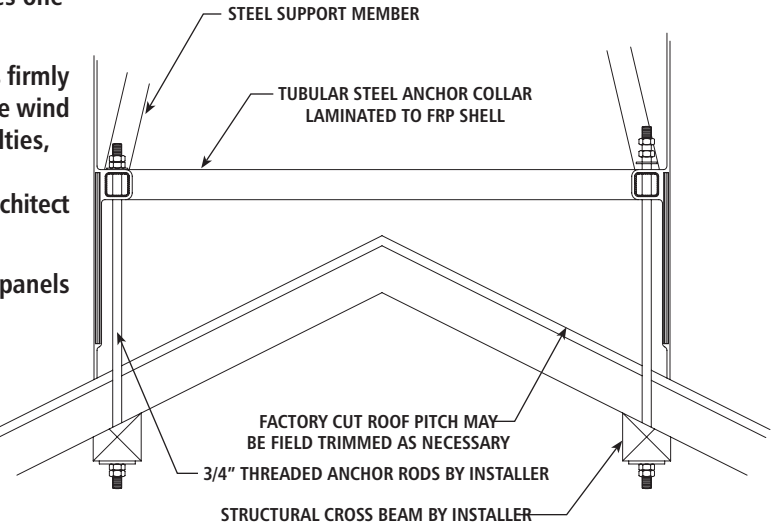


Standing Seam Roof Installation

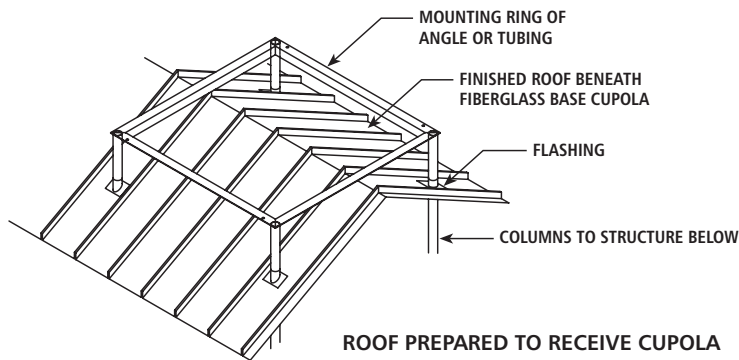


Mounting ring for top of customer's piers also available from FSI (delivered with unit). Consult factory for pricing.


Roof Pitch Information



Single Ridge



4-Way Hip Roof




4-Way Ridge (Gable)

HOW TO...

find your roof pitch!

To determine the pitch of your roof, place a level against the roof as shown below. From the point where the level touches the roof, measure out 12 inches. From this point, measure the distance, in inches, down to the roof. The number out will always be 12. For example, the roof pitch here would be expressed as 6" on 12".

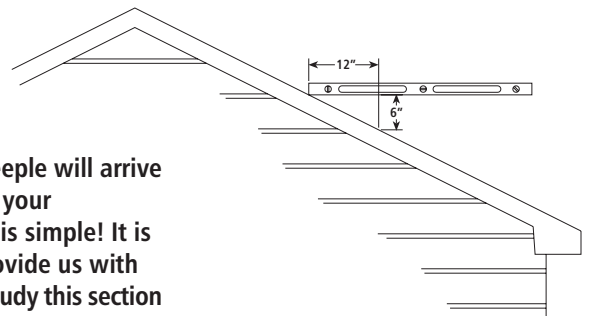

Your Fiberglass Specialties steeple will arrive with the roof pitch pre-cut to your specifications, so installation is simple! It is crucial, however, that you provide us with accurate information. Please study this section carefully before ordering.